

Four Sided Applicator


■ Introduction :

The cylindrical shape provides excellent result especially on fire substrate and smooth surface. By simply rotating through 90° and the next gap can be used.



■ Technical Specification :

- ◆ High grade stainless steel
- ◆ Available in 2 film widths: 60 or 80 mm
- ◆ Available in 4 gaps sizes

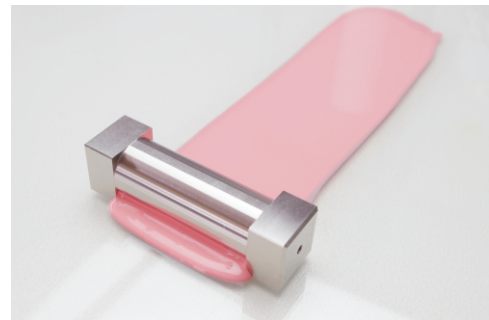

■ Order Information :

BEVS 1803/60/1:	Four Sided Applicator	Width: 60mm	Gap: 30, 60, 90, 120µm
BEVS 1803/60/2:	Four Sided Applicator	Width: 60mm	Gap: 50, 100, 150, 200µm
BEVS 1803/60/F13:	Four Sided Applicator	Width: 60mm	Gap: 25, 50, 75, 100µm
BEVS 1803/80/1:	Four Sided Applicator	Width: 80mm	Gap: 30, 60, 90, 120µm
BEVS 1803/80/2:	Four Sided Applicator	Width: 80mm	Gap: 50, 100, 150, 200µm
BEVS 1803/80/3:	Four Sided Applicator	Width: 80mm	Gap: 100, 200, 300, 400µm
BEVS 1803/80/4:	Four Sided Applicator	Width: 80mm	Gap: 300, 400, 500, 600µm
BEVS 1803/80/F13:	Four Sided Applicator	Width: 80mm	Gap: 25, 50, 75, 100µm

■ Other width and gap size are available upon request.